


# 26-Port Gigabit Ethernet Fiber Switch

This is a 26-port Gigabit Ethernet fiber switch with 24 SFP ports and 2 RJ45 ports. It is designed for demanding network environments and provides fast, reliable connectivity.



## ADDITIONAL IMAGES

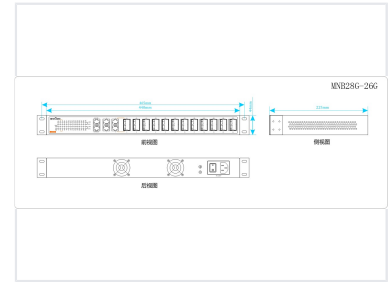

## Overview

### High-Performance Managed Networking

This managed 26-port Gigabit Ethernet switch is engineered for high-bandwidth, real-time environments, offering a robust solution for multi-service integration. Featuring a fanless, low-power design, it ensures reliable operation in diverse settings ranging from enterprise offices to outdoor industrial applications. With support for Ethernet redundant ring protocols, advanced QoS, and comprehensive security policies, this device provides the scalability and manageability required for modern network infrastructures.

## Interfaces & Connectivity

### Port Configuration

**22 ports**

SFP Fiber Ports

**2 ports**

RJ45 Ethernet Ports

**2 ports**

Gigabit Combo Ports

### Interface Specifications

Interface Type	Specification
Console Port	RS232 in RJ45
Ethernet Ports	10/100/1000Base-TX auto-adaptive RJ45
Fiber Ports	1000Base-X SFP

## Switching Performance

### Switching Capabilities

- Switching bandwidth: 56Gbps
- Packet forwarding speed: 41.6Mpps
- MAC Address Table: 8K
- Buffer Memory: 512Kb
- Processing Type: Store & forward, wire speed switching

## Software & Management

### Supported Protocols

IEEE 802.3, IEEE 802.1Q, SNMP v1/v2/v3, MSTP, IGMP Snooping, DHCP Server, SSH, SSL, QoS

## Physical & Environmental

### Physical Dimensions

**440 mm**

Width

**225 mm**

Depth

**44 mm**

Height

**2.75 kg**

Weight

### Operating Conditions

- Operating Temperature: -20°C to +70°C
- Storage Temperature: -40°C to +85°C
- Relative Humidity: 5-95% (non-condensing)
- Installation: 1U Rack Mount

## Power

### Power Specifications

- Input Voltage: 100-240VAC
- Idle Consumption: 1.3A @ 12VDC
- Full-load Consumption: 3.07A @ 12VDC
- Protection: Overload Current Protection