


DIN 5685 A/C Short/Long Link Chain

This high-strength chain is designed according to DIN 5685 A/C standards. It is suitable for various industrial and machinery applications and is available in short and long link configurations.

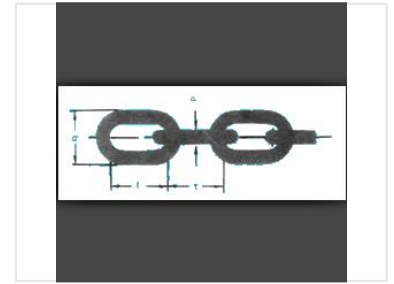

Product Overview

DIN 5685 A/C Link Chain

The DIN 5685 A/C link chain is a versatile industrial component engineered for reliability in demanding load-bearing and connection applications. Available in both short (A) and long (C) link configurations, this chain offers a wide range of sizes to suit diverse machinery and industrial requirements. Constructed for durability and consistent performance, it provides a robust solution for professionals seeking standardized, high-quality hardware.

Technical Specifications

Standard	DIN 5685 A/C
Available Configurations	Short Link (A), Long Link (C)
Size Range	2mm to 13mm

Dimensions and Load Capacity

Size and Load Chart

Size (mm)	Inside Length (mm)	Outside Width (mm)	Weight/100m (kg)	Working Load (N)	Breaking Load (N)
2	12	8	7	500	1250
2.5	14	10	11	750	2000
3	16	12	16.5	1120	2800
4	19	16	30	2000	5000
5	21	20	50	3150	7750
6	24	24	73	4500	11500
7	28	28	100	6000	15000
8	32	32	130	8000	20000
9	36	36	165	10000	25000
10	40	40	205	12500	31000
11	44	44	250	15000	38000
12	48	48	290	18000	45000
13	52	52	345	21200	53000