


Excavator Hydraulic Rotary Grab

Hydraulic rotary grab attachments are capable of full 360-degree rotation. They feature robust bodies and wear-resistant steel plates, along with check and pressure relief valves to prevent overload.

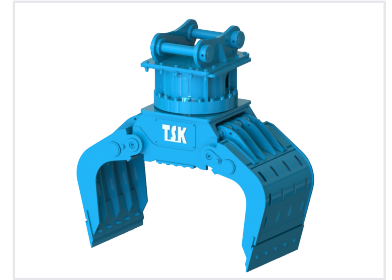

Product Overview

Heavy-Duty Hydraulic Rotary Grab

This hydraulic rotary grab is engineered for versatility and power, featuring full 360-degree rotation for precise material handling. Built with wear-resistant steel, it is designed to withstand the rigors of construction and demolition environments. Integrated safety features like check valves and pressure relief valves prevent operation overload, ensuring reliable performance across various applications including waste, logs, and debris management.

Technical Specifications

Rotation

360° Rotation

Compatible Excavators

2 Ton to 20 Ton

Safety Systems

Check Valve, Pressure Relief Valve

Performance Data

Model Specifications

Model	Max Open (mm)	Grab Capacity (KG)	Max Pressure (MPA)	Flow (L/Min)
RG02	1020	400	16	40-90
RG05	1160	500	16	40-90
RG08	1460	650	22	60-120
RG12	1670	1150	22	60-120
RG20	1880	1500	22	60-120

Applications

Suitable Materials

- Disposable waste
- Brush and wood
- Logs
- Construction debris
- Stones
- Pipes
- Landscaping materials