

Technical Specifications

Mechanical Life

1000000 cycles
Pushbutton

500000 cycles
Selector Switch

Electrical Life

5000000 cycles
Pushbutton

250000 cycles
Selector Switch

Rated Insulation Voltage	600 V
Conventional Heating Current	10 A
Insulation Resistance	e5M©
Contact Resistance	d25h©
Power Frequency Withstand Voltage	AC 2.5KV/min

Compliance & Standards


Standards Compliance

- GB/T14048.1
- IEC60947-5-1

Certifications

CE, ISO9001, ROHS, UL

Mechanical Design

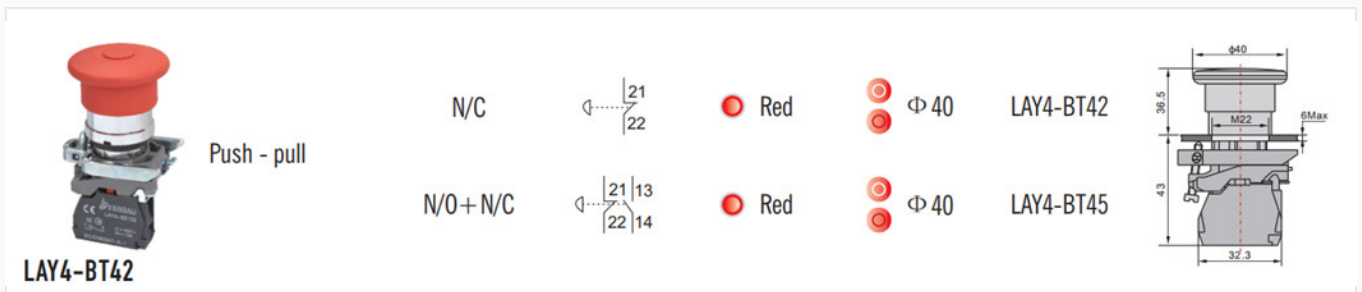

Construction Materials

- Zinc Alloy
- High-grade Anti-flame Plastic
- Silver Alloy Contacts

Mounting Hole Diameter	22mm
Mushroom Head Diameter	40 mm
Operation Mechanism	Push-Pull