


# Robotic Hybrid Multibus Cable

This cable is extremely suitable for robotic systems. Power and data wires are combined in one cable for use in robot dress packages.

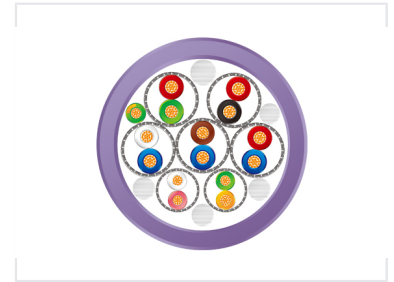

## Overview

### Robotic Hybrid Multibus Cable

This high-performance hybrid multibus cable is engineered specifically for demanding robotic and industrial automation environments. It features a robust construction with ultra-fine stranded copper conductors and a PUR jacket, ensuring exceptional resistance to oil, abrasion, and hydrolysis. Designed for continuous movement, the cable offers excellent flexibility and torsion resistance, making it an ideal solution for applications requiring reliable data transmission and power delivery in high-motion settings.

## Electrical Specifications

### Test Voltage

**1500 V/min**

Core/Core

**1000 V/min**

Core/Shield

### Characteristic Resistance (@1MHz)

Protocol	Resistance
Interbus	100±15Ω
Profibus	150±15Ω
Devicenet	120±15Ω

### Rated Voltage

30V (UL/CSA)

### Insulation Resistance

e100MΩm (at 20°C)

## Mechanical & Environmental

### Temperature Range

Application	Range
Fixed	-40°C to 80°C
Mobile	-30°C to 80°C

### Minimum Bending Radius

**5 D**

Fixed

**12 D**

Mobile

## Construction

### Material Composition

- Conductor: Ultra-fine stranded bare copper (IEC 60228/VDE 0295 class 6)
- Insulation: Profibus (foam PE), Devicenet & Interbus (PE)
- Power Core: TPE
- Shielding: Tinned copper braiding
- Jacket: PUR

### Jacket Color

Purple (similar to RAL 4001)

## Features

### Key Features

Halogen Free • Flame Resistant • Oil Resistant • Abrasion Resistant • Anti-hydrolysis • EMI Shielded