


# Three-Channel Digital Display Controller

This is a three-circuit digital display controller capable of simultaneously inputting three channels of the same type of signal, displayed by three digital screens separately. The instrument can be equipped with RS485 or RS232 communication interface, or three relays corresponding to the alarm output of the three input signals.

> 产品概述  
三回路数字显示控制仪 可同时输入三路同一种输入类型的信号, 由三个数码屏分别显示, 仪表可带RS485或RS232通讯接口, 或三个继电器分别对应三路输入信号的报警输出。

> 仪表外形尺寸及开孔尺寸

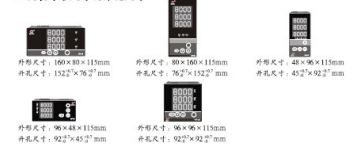

## Product Overview

### Three-Channel Digital Display Controller

This versatile digital display controller is designed to simultaneously process and display three channels of the same signal type. Featuring three independent digital screens, it provides clear, real-time monitoring for complex industrial applications. The instrument supports flexible integration options, including RS485 or RS232 communication interfaces, and is available with three relays for individual alarm output per channel.

## Technical Specifications

Channel Capacity	3 channels
Communication Interfaces	RS485, RS232
Alarm Output	Yes

## Dimensions

### Available Dimensions

Outer Dimensions (mm)	Panel Cutout (mm)
160 × 80 × 115	152 × 76
80 × 160 × 115	76 × 152
48 × 96 × 115	45 × 92
96 × 48 × 115	92 × 45
96 × 96 × 115	92 × 92