

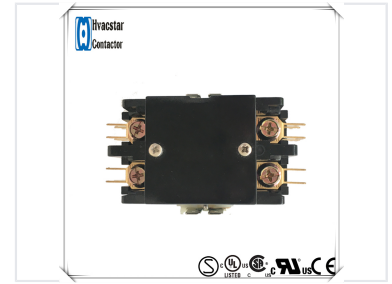


# 2-Pole 30A AC Air Conditioning Definite Purpose Contactor

This 2-pole contactor is rated at 30A and designed for AC air conditioning applications. It is UL listed to meet safety standards.



## ADDITIONAL IMAGES



## Product Overview

### Professional Grade AC Contactor

This 2-pole definite purpose contactor is engineered for reliable switching in HVAC&R and air conditioning applications. It features high-quality silver cadmium oxide contacts to ensure excellent electrical conductivity and long-term durability. Built for demanding environments, this component meets strict international safety standards and is designed to provide up to 1,000,000 mechanical cycles.

## Electrical Specifications

### F/L Inductive Amps

**30 A**

Inductive Current

### Locked Rotor Amps

Voltage (V)	Amperage (A)
240	180
480	150
600	120

Resistive Amps	40 A
Coil Voltage	120 V
Frequency	50/60 Hz
Number of Poles	2

## Compliance and Standards


Certifications	UL 508, CE, Semko, CSA
----------------	------------------------

## Compatibility

### Cross-Reference Models

- Siemens 45EG20AF
- Fasco C2S30B
- Cutler-Hammer C25BNB230A
- GE CR453CC2AAA
- Gemline GDP3021

## Construction



Features durable molded housing and screw terminals for secure installation.

### Design Highlights

Silver Cadmium Oxide Contacts • Durable Molded Housing • Screw/Box Lug Terminals • Standard Mounting Plate