


2-Pole Residual Current Circuit Breaker with Overload Protection

This 2-pole residual current circuit breaker (RCCB) provides overload protection for electrical safety. It has a test button for monthly testing, a leakage trip indicator, and a reset function.



ADDITIONAL IMAGES

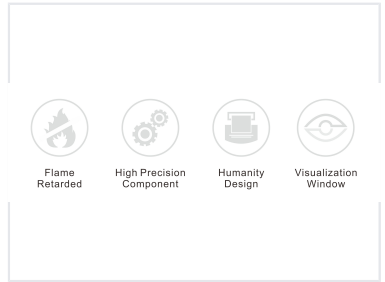

Overview

Professional Electrical Protection

This 2-pole Residual Current Circuit Breaker with Overload Protection is engineered for reliable safety in both residential and commercial electrical systems. It features advanced leakage detection with a rapid response time and utilizes high-quality, heat-resistant materials for long-term durability. Designed for ease of use, it includes integrated status indicators and a test function to ensure consistent operational safety.

Electrical Ratings

Available Rated Currents

- 6
- 10
- 16
- 20
- 25
- 32
- 40
- 50
- 63

Rated Voltage	AC 230V
Rated Breaking Capacity	4500 A

Performance

Tripping Characteristic
C32

Residual Operating Current	15mA - 30mA
----------------------------	-------------

Reaction Time	0.03s - 0.08s
---------------	---------------

Build Quality

Design Features

- Breaking indicator light
- Test button for monthly maintenance
- Visualization window
- Reset button
- Imported key components

Construction Materials	BMC Material, Nylon, Heat-resistant (800°C)
------------------------	---

Compliance

Regulatory Standards	IEC60898, IEC61009, IEC60947, IEC60947-2, GB16917.1, IEC61009-1
----------------------	---