

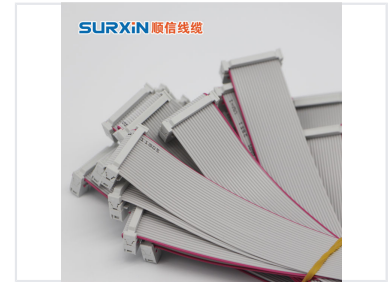


20-Pin IDC Flat Ribbon Cable Assembly, 2.54mm Pitch, 28 AWG

This is a 20-pin IDC flat ribbon cable assembly with a 2.54mm pitch. The cable is constructed with 28 AWG stranded tinned copper conductors and terminated with IDC connectors at both ends.



ADDITIONAL IMAGES



Product Overview

Professional Ribbon Cable Assembly

This 20-pin IDC flat ribbon cable assembly is designed for reliable signal transmission and efficient electronic system integration. Featuring a 2.54mm pitch and high-quality 28 AWG stranded tinned copper conductors, it offers both flexibility and secure, gas-tight termination. Its flat design helps optimize space, improve airflow, and simplify routing within compact electronic enclosures.

Technical Specifications

Number of Pins	20
Pitch	2.54 mm
Wire Gauge	28 AWG
Length	20 cm

Physical Properties

Insulation Material	PVC
Conductor Type	Stranded Tinned Copper
Connector Type	IDC (Insulation Displacement Connector)

Applications

Typical Applications	Internal Wiring, Signal Routing, Data Transmission, Circuit Board Interconnects
----------------------	---