


2x2 CCT Wattage Switchable LED Panel Light

This LED panel light is designed in a 2x2 size, suitable for standard ceiling grids. It features both CCT (Correlated Color Temperature) and wattage switchability, providing versatile lighting options.

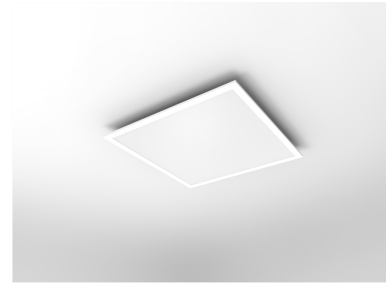

Product Overview

Versatile Ambient Lighting Solution

This 2x2 LED panel light is engineered for high-performance ambient lighting in commercial and institutional settings such as offices, hospitals, and schools. Featuring both CCT and wattage switchability, it offers unparalleled flexibility to adjust color temperature and brightness levels to suit specific environment requirements. Designed for energy efficiency, this luminaire provides up to 70% energy savings compared to traditional fluorescent troffers and boasts a long operational life of over 50,000 hours.

Key Performance Metrics

Operational Life

50000 hrs

Lifespan

Energy Efficiency

Up to 70% savings over lifespan

Technical Specifications

Dimming	0-10VDC
Input Voltage	100-277V AC (50-60Hz)
Operating Temperature	-20 to 40°C

Installation & Design

Mounting Options

- Recessed (grid ceilings)
- Suspended (hanging brackets)
- Surface mount (requires optional kit)

Key Features

CCT Switchable, Wattage Switchable, Uniform Illumination, No Pixilation