


2x2 LED Flat Panel Light

This 2x2 LED panel light meets the latest 2020 UL 8750 standard and has UL approval. It features 0-10V isolated dimming and is compatible with emergency backup drivers.

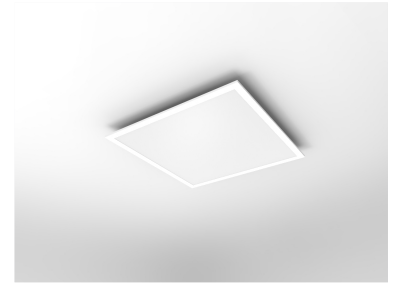

Overview

High-Efficiency 2x2 LED Flat Panel

Designed for versatile indoor applications, this 2x2 LED flat panel offers uniform, flicker-free illumination ideal for offices, schools, hospitals, and retail environments. It serves as an energy-efficient replacement for traditional fluorescent troffers, delivering up to 70% energy savings over its lifespan. With a universal voltage range and standard 0-10V dimming capability, this luminaire ensures flexible installation and long-term reliability.

Performance Metrics

Rated Lifespan

50000 hrs

Lifespan

Energy Savings

Up to 70%

Technical Specifications

Input Voltage	100-277V AC
Frequency	50-60Hz
Dimming Capability	0-10V DC
Operating Temperature	-20 to 40

Installation & Compatibility

Mounting Options

- Recessed (Grid Ceilings)
- Suspended (Hanging Brackets)
- Surface Mount (Optional Kit Required)

Applications

Suitable Environments

Schools, Offices, Hospitals, Retail Stores