


## 2x4 LED Flat Panel Light 5000lm

This LED panel light meets UL 8750 and DLC 5.1 standards, ensuring quality and performance. It is compatible with emergency backup drivers and features 0-10V dimming for adjustable light levels.

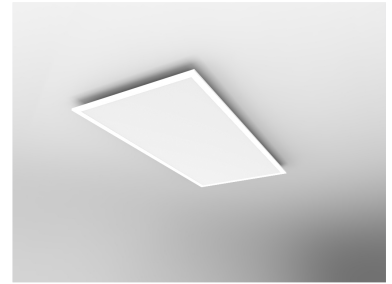

### Product Overview

#### High-Efficiency 2x4 LED Flat Panel

This 2x4 LED flat panel is engineered to provide uniform, high-quality ambient lighting for commercial and institutional environments such as offices, schools, and hospitals. Featuring a high-efficacy design, it delivers 5000 lumens while offering significant energy savings of up to 70% compared to traditional fluorescent troffers. With a lifespan exceeding 50,000 hours and instant-on, dimmable performance, this luminaire is a reliable, low-maintenance solution for both new construction and retrofit projects.

### Performance Metrics

#### Light Output

**5000 lm**

Luminous Flux

**50000 hrs**

Lifespan

#### Dimming

0-10VDC

### Electrical Specifications

#### Input Voltage

100-277V AC

#### Frequency

50-60Hz

### Operating Environment

#### Operating Temperature

-20 to 40°C

### Installation & Compatibility

#### Recommended Applications

- Offices
- Schools
- Hospitals
- Retail Stores

#### Mounting Options

Recessed Grid Ceiling, Suspended, Surface Mount (Optional Kit)