


2x4 Standard LED Panel Light

This 2x4 LED panel light meets the latest 2020 UL 8750 standard and has UL approval. It features flicker below 2% and dimming from 10-100%.

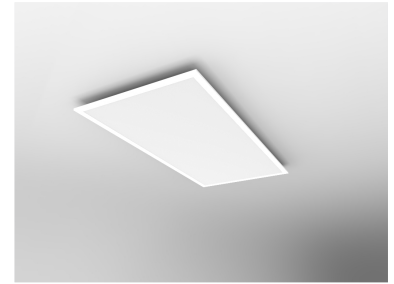

Overview

Professional LED Troffer Solution

This 2x4 LED panel light is engineered for high-performance ambient lighting in commercial environments such as offices, schools, and hospitals. It offers a seamless, uniform illumination with no visible pixelation, serving as an ideal energy-efficient replacement for traditional fluorescent troffers. Designed for versatility, it supports both new construction and retrofit installations with standard 0-10V dimming capabilities.

Technical Specifications

Input Voltage	100-277V AC
Frequency	50-60Hz
Dimming	0-10V DC

Performance

Rated Lifespan

50000 hrs

Lifespan

Energy Efficiency

Up to 70% Energy Savings

Operating Environment

Operating Temperature Range	-20°C to 40°C
-----------------------------	---------------

Installation

Mounting Methods	Recessed (Grid Ceiling), Suspended, Surface Mount (Optional Kit)
------------------	--

Application

Suitable Environments

- Schools
- Offices
- Hospitals
- Retail Stores