


## 3-Core Rubber Power Cable

This rubber cable is configured with three cores. Each core has a cross-sectional area of 2.5mm<sup>2</sup> and the cable is rated at 450/750V.

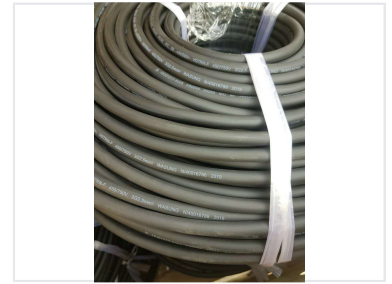

### Overview

#### Professional Grade Power Solutions

This 3-core rubber power cable is engineered for heavy-duty applications, providing reliable power delivery for high-consumption household appliances and air conditioning systems. Built to rigorous international standards, it offers robust performance and durability for professional electrical installations. Its flexible design ensures ease of use while maintaining the safety and efficiency required for demanding power supply requirements.

### Technical Specifications

Voltage Rating	450/750V
Cross-sectional Area	2.5 mm <sup>2</sup>
Number of Cores	3

### Standards & Compliance

International Standards	H05RR-F, H07RN-F, 60245IEC 53, 60245IEC 66
-------------------------	--

### Applications

#### Typical Applications

- High-power household appliances
- Air conditioning units
- Heavy-duty power cords