


325-350W Dual Glass Polycrystalline PV Module


This dual glass polycrystalline PV module is available in power outputs ranging from 325W to 350W. It features a durable dual glass construction for enhanced longevity and performance in various applications.



ADDITIONAL IMAGES

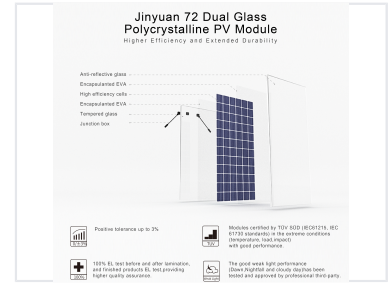

Product Overview

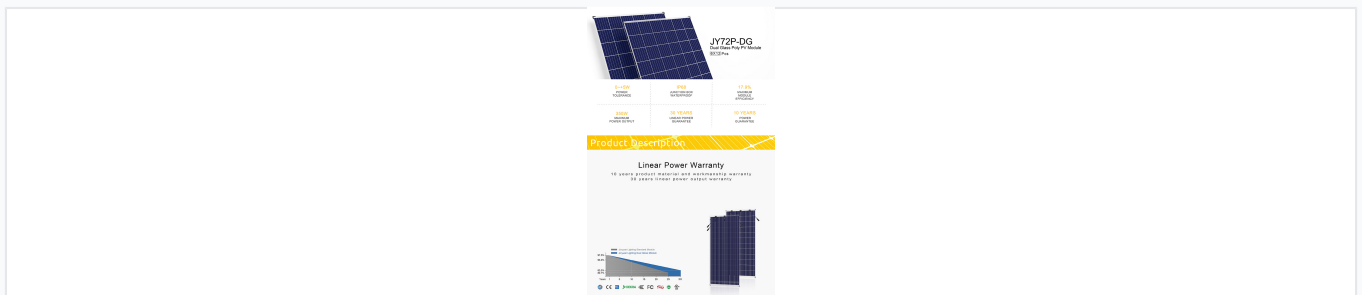

Summary of module performance metrics, including power output and warranty guarantees.


High-Efficiency Dual Glass PV Module

This dual glass polycrystalline photovoltaic module is engineered for superior durability and performance in both residential and commercial solar installations. Featuring high-transparency tempered glass and an IP68-rated waterproof junction box, it ensures reliable power generation even in challenging environmental conditions. The module offers excellent weak-light performance and is rigorously tested to international standards, providing a cost-effective solution for sustainable energy needs.

Key Features

Product Details

• Solar Cell
Monocrystalline cells, high efficiency solar panel, most cost-effective and clear option for residential, commercial photovoltaics and so power system.



• Glass
High transparent anti-clean tempered glass to increase the light absorption efficiency, reduce the power loss which is caused by dust.



• Junction Box
IP68 Waterproof and Quality grade ensures optimal working ability, fireproof, insulation performance, long service life.



Detailed component breakdown highlighting high-efficiency cells, self-cleaning glass, and IP68 junction box.

Construction Highlights

Dual Glass Design • Anti-Reflective Glass • IP68 Waterproof Junction Box • 100% EL Tested

Certifications

CE, IEC 61215, IEC 61730, DEKRA, FC, SAA

Electrical Performance (STC)


Electrical Performance Data

Parameter	335W	340W	345W	350W	355W
Pmax (W)	335	340	345	350	355
Vmp (V)	38	38.3	38.5	38.7	38.9
Imp (A)	8.85	8.87	9.01	9.11	9.13
Voc (V)	46	46.2	46.6	47	47.3
Isc (A)	9.34	9.36	9.52	9.68	9.7
Efficiency (%)	17	17.3	17.5	17.8	18

Physical Dimensions

Jinyuan 72 Dual Glass Polycrystalline PV Module

OEM and ODM services are available



Physical dimensions of the dual glass module (1968mm x 992mm).

Dimensions

1968 mm

Length

992 mm

Width

Warranty & Reliability

Warranty Terms

- 10-year product material and workmanship warranty
- 30-year linear power output warranty

Power Tolerance

0 to +5W