



Bicycle Derailleur

This bicycle derailleur is designed for 18/21 or 15/18 speed index systems and features bracket installation. It is suitable for double, triple, or quadruple chainwheel systems and offers a capacity of 14T or 22T.

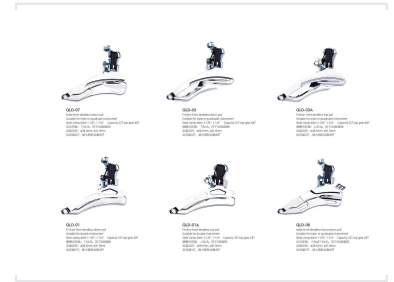

ADDITIONAL IMAGES



Product Overview

High-Performance Bicycle Drivetrain Components

This collection of bicycle derailleurs includes both rear and front shifting mechanisms designed for durability and smooth operation. Engineered for various speed systems and chainwheel configurations, these components feature robust steel construction and versatile installation options to suit a wide range of bicycle frames. Whether for indexed or friction shifting, these derailleurs provide reliable performance for multi-speed drivetrain setups.

Rear Derailleurs

Specifications Table

Model	Speed System	Total Capacity
QLB-23	18/21 Speed	43T
QLB-21	18/21 Speed	43T
QLB-18	18/21 Speed	43T
QLB-15	15/18 Speed	36T

Available Models	QLB-23, QLB-21, QLB-18, QLB-15
Cage Type	Long cage

Front Derailleurs

Key Metrics

48 T

Max Chainwheel Teeth

31.8 mm

Max Clamp Diameter

Compatibility & Installation

- Clamp diameters: 1-1/8", 1-1/4" (28.6mm, 31.8mm)
- Pull types: Top-pull, Down-pull, or Dual-pull
- Chainwheel systems: Double, Triple, or Quadruple

Available Models

QLD-07, QLD-03, QLD-03A, QLD-01, QLD-01A, QLD-08