

Double Head Push Button Switch with Waterproof Cover

This double-headed push button switch is designed with a waterproof cover for durability. It features both normally open (NO) and normally closed (NC) contacts, offering versatile control options.



ADDITIONAL IMAGES



Product Overview

Industrial Double Head Push Button Switch

This double-head push button switch features an integrated waterproof cover, making it ideal for demanding industrial environments where protection against dust and moisture is critical. Designed for versatile control, it includes both normally open (NO) and normally closed (NC) contacts. The unit is constructed with high-grade anti-flam plastic and zinc alloy for durability, ensuring reliable performance in control circuits for distribution boxes, cabinets, and machinery.

Certifications

CE, ISO 9001, ROHS, UL

Technical Specifications

Electrical Ratings

600 V

Rated Insulation Voltage

10 A

Conventional Heating Current

2.5 KV/min

Withstand Voltage

Performance Metrics

| Parameter | Value |
|------------------------|---------------------|
| Insulation Resistance | e5M© |
| Contact Resistance | d2m© |
| Voltage Wave Tolerance | ±20% |
| Signal Lamp Brightness | 60cd/m ² |


Operational Life

- Mechanical Life (Pushbutton): 1,000,000 cycles
- Mechanical Life (Selector): 500,000 cycles
- Electrical Life (Pushbutton): 5,000,000 cycles
- Electrical Life (Selector): 250,000 cycles
- Signal Lamp Life: 100,000 hours

Design & Construction



Double head design featuring flush green and red buttons with waterproof cover protection.

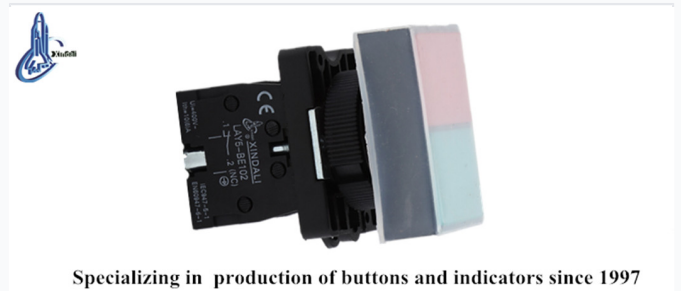

The switch is equipped with a protective waterproof cover for enhanced durability in harsh environments.

Physical Characteristics

- Mounting Thread: M22
- Head Dimensions: 57x32mm
- Overall Height: 43mm
- Protection Rating: IP65
- Contact Configuration: 1NO + 1NC

Material Composition

Zinc Alloy • Anti-flam Plastic • Silver Alloy Contacts