


Dual Submersible Macerator Pump System

This dual pump macerator system is designed for efficient wastewater management, integrating two submersible pumps with an intelligent control panel for automated operation. It is suitable for residential or commercial applications where wastewater needs to be pumped to a higher elevation or over a distance.



ADDITIONAL IMAGES

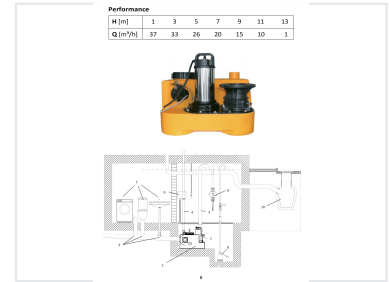

Product Overview

Dual Submersible Macerator Pump System

This dual pump macerator system is engineered for efficient wastewater management in both residential and commercial environments. It features two submersible pumps integrated with an intelligent control panel, allowing for automated operation and reliable performance. Designed for locations where gravity drainage is not feasible, such as basements or areas below the main sewer line, this system effectively grinds and pumps sewage to higher elevations or over long distances.

Technical Specifications

Performance Capacity

37 m³/h

Flow Rate at 1m Head

15 m³/h

Flow Rate at 9m Head

13 m

Maximum Head

Performance Curve Data

| Head (m) | Flow (m³/h) |
|----------|-------------|
| 1 | 37 |
| 3 | 33 |
| 5 | 26 |
| 7 | 20 |
| 9 | 15 |
| 11 | 10 |
| 13 | 1 |

Control System

Control Panel Features

- Intelligent digital display
- Manual and automatic operation modes
- Individual pump control (A/B)
- Adjustable pump activation/stop levels
- Automated pump start/stop logic

System Features

Key Features

Dual Pump System, Submersible, Wastewater Management, Heavy Duty Macerator, Automated Control