


Eccentric Reducing Pipe Coupling

This eccentric reducing coupling connects pipes of differing diameters. It is available in sizes ranging from 40x32mm to 160x110mm.

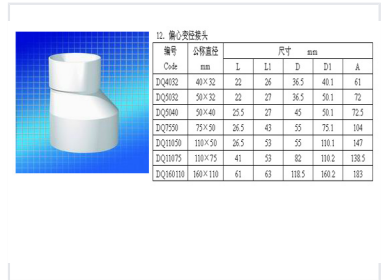

Product Overview

Eccentric Reducing Pipe Coupling

The eccentric reducing pipe coupling is a specialized plumbing component designed to connect pipes of different diameters while maintaining a flush alignment on one side. This design is essential for drainage systems and fluid transport where maintaining a consistent flow gradient or clearing obstacles is required. Engineered for precision, these couplings ensure reliable, leak-resistant connections across various industrial and residential piping applications.

Technical Specifications

Dimensions Table

Code	Nominal Size	L (mm)	L1 (mm)	D (mm)	D1 (mm)	A (mm)
DQ4032	40x32	22	26	36.5	40.1	61
DQ5032	50x32	22	27	36.5	50.1	72
DQ5040	50x40	25.5	27	45	50.1	72.5
DQ7550	75x50	26.5	43	55	75.1	104
DQ11050	110x50	26.5	53	55	110.1	147
DQ11075	110x75	41	53	82	110.2	138.5
DQ160110	160x110	61	63	118.5	160.2	183

Max Diameter

160 mm

Maximum Outer Diameter

Available Sizes

40x32mm, 50x32mm, 50x40mm, 75x50mm, 110x50mm, 110x75mm, 160x110mm