

Electric Motorcycle for Adult Riders


This electric motorcycle is designed for adult riders seeking an eco-friendly mode of transportation. The lithium-ion battery-powered vehicle combines the convenience of a motorcycle with the environmental benefits of an electric vehicle.



ADDITIONAL IMAGES



Overview

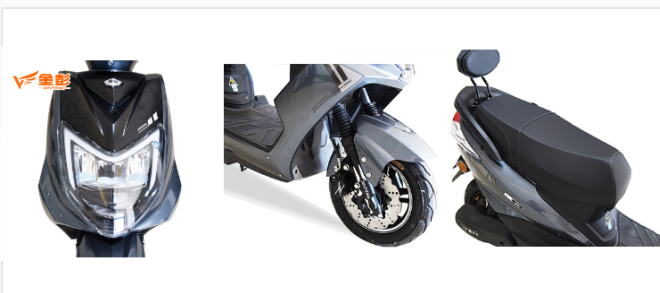

Modern and stylish design optimized for urban commuting.



Professional packaging and exhibition display.

Efficient Urban Mobility

This electric motorcycle is designed for adult riders seeking an efficient, eco-friendly, and stylish mode of transportation. It combines the convenience of a motorcycle with a powerful electric powertrain, featuring integrated lighting, responsive braking, and a comfortable seat for daily commuting or recreational use. Built with a robust frame and advanced suspension, it offers a smooth, reliable, and quiet riding experience on various urban road surfaces.

Performance

Motor Power	1200 W
Maximum Speed	55 km/h
Range per Charge	50 km
Grade Ability	10 °


Battery & Charging

Battery Specifications	60V 20AH
Charging Time	7 hours

Dimensions & Capacity

Overall Dimensions	1850 x 715 x 1050 mm
Curb Weight	100 kg
Loading Capacity	150 kg

Technical Specifications

	<table><tr><td>Model</td><td>M6</td></tr><tr><td>Overall Dimension /mm:</td><td>1850*715*1050</td></tr><tr><td>Curb weight/kg</td><td>100</td></tr><tr><td>Loading capacity/kg</td><td>150</td></tr><tr><td>Motor</td><td>1200W</td></tr><tr><td>Controller</td><td>60V 12tube 35A</td></tr><tr><td>Brake system</td><td>front: disc/rear: drum</td></tr><tr><td>Front/rear tire</td><td>3.0-10 tubeless</td></tr><tr><td>Front suspension</td><td>φ30 hydraulic</td></tr><tr><td>Rear suspension</td><td>φ30*290mm hydraulic</td></tr><tr><td>Battery</td><td>60V20AH</td></tr><tr><td>Charging time(h)</td><td>6-8h</td></tr><tr><td>Range per charge/km</td><td>50</td></tr><tr><td>Max speed (km/h)</td><td>55</td></tr><tr><td>Grade ability</td><td>10°</td></tr><tr><td>Container Capacity</td><td>42 pcs CBU/40HQ</td></tr></table>	Model	M6	Overall Dimension /mm:	1850*715*1050	Curb weight/kg	100	Loading capacity/kg	150	Motor	1200W	Controller	60V 12tube 35A	Brake system	front: disc/rear: drum	Front/rear tire	3.0-10 tubeless	Front suspension	φ30 hydraulic	Rear suspension	φ30*290mm hydraulic	Battery	60V20AH	Charging time(h)	6-8h	Range per charge/km	50	Max speed (km/h)	55	Grade ability	10°	Container Capacity	42 pcs CBU/40HQ
Model	M6																																
Overall Dimension /mm:	1850*715*1050																																
Curb weight/kg	100																																
Loading capacity/kg	150																																
Motor	1200W																																
Controller	60V 12tube 35A																																
Brake system	front: disc/rear: drum																																
Front/rear tire	3.0-10 tubeless																																
Front suspension	φ30 hydraulic																																
Rear suspension	φ30*290mm hydraulic																																
Battery	60V20AH																																
Charging time(h)	6-8h																																
Range per charge/km	50																																
Max speed (km/h)	55																																
Grade ability	10°																																
Container Capacity	42 pcs CBU/40HQ																																

Detailed technical specifications and dimensions.

Brake System

Position	Type
Front	Disc
Rear	Drum

Suspension System

- Front: $\text{AE}30$ hydraulic
- Rear: $\text{AE}30*290$ mm hydraulic

Tire Specifications	3.0-10 tubeless
Controller	60V 12tube 35A

Features

Key Features

Digital Display • Integrated Lighting • Tubeless Tires • Step-through Frame • Rear Backrest