


Electric Wire Rope Hoist - European Standard

This electric wire rope hoist is designed for demanding industrial applications. It features robust construction and advanced control systems for smooth and efficient lifting.



ADDITIONAL IMAGES

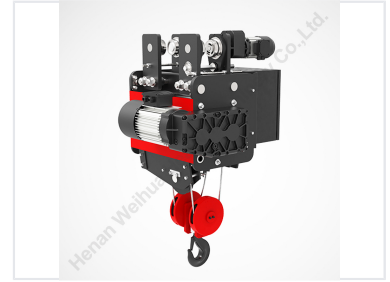

Overview

High-Performance European Standard Hoist

This electric wire rope hoist is engineered to meet rigorous international standards, offering a modular design for versatile industrial applications. Built with advanced high-precision components, it features a compact, low-headroom configuration that maximizes lifting height and minimizes dead zones in your facility. Designed for efficiency and sustainability, the unit incorporates energy-saving motor technology and maintenance-free components, ensuring long-term reliability and environmental compliance.

Technical Specifications

Performance Highlights

70 dB

Noise Level

30 %

Motor Power Reduction

20 %

Efficiency Improvement

NRL Model Specifications

Capacity (t)	Work Duty	Lifting Speed (m/min)	Lifting Height (m)	Rail Width (mm)
3	M5	5/0.8	2-20	200-350
5	M5	5/0.8	2-20	200-450
10	M5	5/0.8	2-20	200-550

Available Structural Models

NRL (Low-headroom monorail), NRS (Standard headroom monorail), NRT (Double-rail trolley), NRF (Foot-mounted)

Design Features

Key Design Concepts

- Modular design with flexible motor and reducer configurations
- Compact low-headroom design for maximized lifting space
- High-precision hard-toothed gear reducer
- Aluminum alloy shells for heat dispersion and noise reduction
- Maintenance-free design for critical components

Safety & Compliance

Safety Standards

GB Standard Compliant • FEM Standard Compliant • Non-asbestos brake pads • Electromagnetic disk brake • T-class high-strength hook