


Female Threaded Globe Valve

This globe valve is designed with female screw ends, ensuring secure and reliable connections. It is constructed to meet GB12233 face-to-face standards and supports GB7307, DIN 2999, NPT, and BSP thread standards.

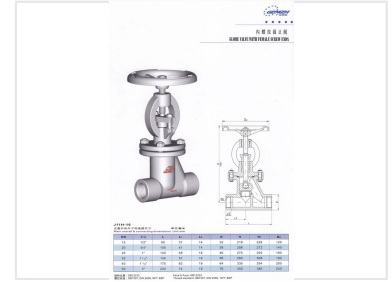

Product Overview

Precision Flow Control

This globe valve is engineered with female screw ends to ensure secure and reliable connections in industrial piping systems. Built to adhere to rigorous face-to-face and thread standards, it offers consistent performance for demanding flow control applications. Its robust construction makes it an ideal choice for professionals requiring dependable fluid regulation.

Technical Standards

Face to Face Standard	GB12233
Thread Standards	GB7307, DIN 2999, NPT, BSP

Dimensions

Dimensional Specifications

DN	Thread (ZG)	Length (L)	Height (H)
15	1/2"	90	218
20	3/4"	100	258
25	1"	120	275
32	1 1/4"	140	280
40	1 1/2"	170	330
50	2"	200	350

Key Features

Available Nominal Diameters (DN)

- 15
- 20
- 25
- 32
- 40
- 50