

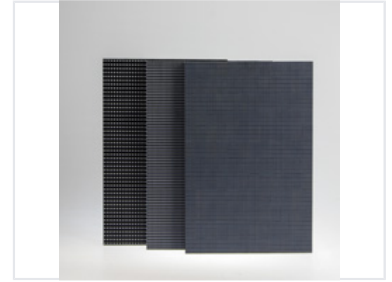


High-Resolution LED Screen for Digital Signage

This high-resolution LED screen is designed for various display applications. It features a modular design for flexible configuration and easy maintenance.



ADDITIONAL IMAGES



Product Overview

High-Performance LED Display System

This high-resolution LED screen system is designed for professional digital signage and large-format display applications. Featuring a modular architecture, it delivers exceptional visual clarity with a high refresh rate and precise color reproduction. Built for durability and reliability, these screens are suitable for both indoor and outdoor environments, offering flexible configuration options to meet specific viewing distance and resolution requirements.

Technical Specifications

Model Comparison

Feature	Ph3	Ph4	Ph6
Min. Viewing Distance	>3m	>4m	>6m
Scanning Mode	1/16	1/8	1/8

Display Performance

1200 cd/㎡
Brightness

1000 Hz
Refresh Rate

14 bits
Grayscale

General Parameters

- Viewing Angle: $\geq 140^\circ$
- Color Depth: $>16.7M$ colors
- Color Temperature: 6500K
- Control Mode: Synchronous
- Drive Method: Constant Current
- Frame Frequency: 60Hz
- Brightness Adjustment: 256 levels

Operational & Environment

Operational Specs

- Max Power Consumption: d1200W/j
- Operating Voltage: AC220V/100V \pm 10%
- Operating Temperature: -20 to 50
- Protection Rating: IP65
- Blind Spot Rate: <0.0001

Reliability

10000 hours

MTBF

100000 hours

Service Life