

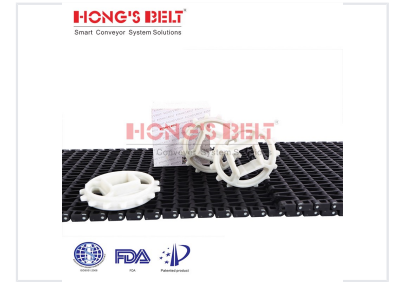


HS-2600B Modular Plastic Conveyor Belt

The HS-2600B modular plastic conveyor belt is designed for heat shrink tunnel lines. Its modular design allows for easy assembly, disassembly, and maintenance, reducing downtime and increasing operational efficiency.



ADDITIONAL IMAGES



Overview

Modular Plastic Conveyor Belt

This modular plastic conveyor belt is engineered for high-performance applications, including heat shrink tunnel lines and various industrial processing environments. Its modular design allows for efficient assembly, maintenance, and repair, significantly reducing downtime. Built to withstand demanding conditions, the belt offers chemical and abrasion resistance, ensuring a long service life and reliable operation.

Technical Specifications

Belt Dimensions

25 mm

Pitch

11 mm

Thickness

182 mm

Min. Width

4.9 mm

Rod Diameter

Performance Metrics

44 %

Open Area

1.2 tons/m²

Max Load Capacity

Regulatory Compliance

FDA Approved • EU Compliant

Working Temperature

-40°C to 260°C

Material Composition

PP, POM, PE, PA

Available Colors

White, Blue, Gray, Nature, Dark-brown

Design Features

Sprocket Configuration

- 9T
- 11T
- 13T
- 15T
- Square bore
- Round bore

Belt Capabilities

Feature	Status
Flight	No
Side Guard	No
Curve Capability	No

Applications

Industries Served

- Meat & Poultry Processing
- Seafood
- Bakery
- Snack Food
- Fruit & Vegetables
- Automotive
- Tire Manufacturing
- Packaging
- Printing & Paper
- Postal Services
- Corrugated Cardboard
- Can Manufacturing
- PET Manufacturing
- Textile