


Industrial LED Lantern with Hanging Hook

This LED lantern provides robust and efficient lighting for industrial applications. It includes a handle for easy transport and hooks for secure fastening.



ADDITIONAL IMAGES

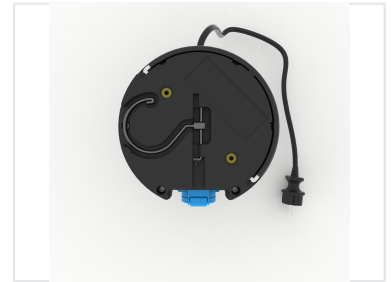

Overview



Detailed technical overview and mounting capabilities of the LED lantern.

Versatile Industrial Lighting

This industrial LED lantern is a robust lighting solution designed for both indoor and outdoor environments. Constructed with a durable PC body and an impact-resistant lens, it features an aluminum heat sink for effective thermal management. It offers a 360-degree circle of illumination, making it ideal for demanding job sites where reliable, shadow-free light is essential.

Performance

Luminous Flux

2800 lm
Brightness

Energy Efficiency Class

A+

Color Temperature Range

2700K - 6500K

Color Rendering Index (Ra)

80 Ra

Physical Characteristics

Construction Materials

- Durable PC body
- Impact-resistant PC lens
- Aluminum heat sink
- Metal handle
- Metal hook

Dimensions (W x H)	190mm x 235.5mm
--------------------	-----------------

Protection Ratings	IP54, IK10
--------------------	------------

Operational Features

Mounting Options

- Hanging hook
- Wall mount
- Ceiling mount
- Tripod stand (via screws)

Sensor Capabilities

Select models include a microwave sensor detector with a detection distance exceeding 10 meters (at a height of 3.5 meters). Adjustable hold times are available at 30s, 90s, 5min, or 15min, with an optional 30% brightness mode during inactivity.

Working Temperature	-20°C to 55°C
---------------------	---------------

Emergency Models

Emergency Mode Specifications

Feature	Specification
Emergency Power	5 Watts
Emergency Lumens	450 Lumens
Emergency Duration	3 Hours
Battery	7.4V 2.2AH Li-ion
Full Charge Time	12 Hours