

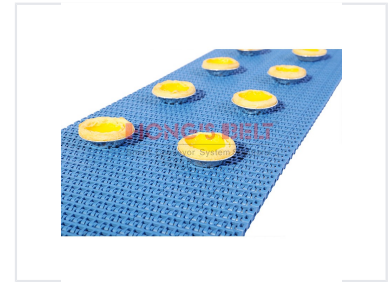


Modular Plastic Conveyor Belt - 15.2mm Pitch, Food Grade

This modular plastic conveyor belt is designed for the food industry, featuring a 15.2mm pitch. It is constructed from food-approved materials and can withstand temperatures from -40 to 260 degrees.



ADDITIONAL IMAGES



Overview

High-Performance Modular Conveyor Belt

This modular plastic conveyor belt is engineered specifically for the food industry, offering a durable and hygienic solution for various processing and packaging lines. Designed with a 15.2mm pitch and an open area of 28%, it facilitates efficient drainage and airflow, which is critical for food safety and sanitation. With a maximum load capacity of 1.2 tons per square meter and a wide operating temperature range, it provides reliable performance in demanding environments from food defrosting to high-speed packaging.

Technical Specifications

Max Load Capacity

1.2 tons/m²

Max Load

Pitch	15.2 mm
Thickness	8.8 mm
Minimum Width	152 mm
Open Area	28 %
Rod Diameter	4.5 mm
Working Temperature	-40°C to 260°C

Features & Compatibility

Available Colors

White • Blue • Gray • Nature • Dark-brown

Design Features

- Flight: Yes
- Side Guard: No
- Curve: No

Certifications

FDA, EU Approved

Available Materials

PP, POM, PE, PA

Available Sprocket Dimensions

12T, 16T, 24T, 32T, 18T-2R, 32T-2R

Applications

Industries Served

Category	Industries
Food Industry	Meat, Poultry, Sea Food, Bakery, Snack Food, Fruit & Vegetables
Non-food Industry	Automotive, Tire, Packaging, Printing/Paper, Postal, Corrugated, Can, PET, Textile