


# Non-Magnetic Alignment Rod

This non-magnetic tool maintains good toughness in extreme temperatures, from -250°C to 600°C, and resists corrosion better than stainless steel. Its lightweight, high-strength titanium alloy construction offers impact resistance, making it suitable for various applications.

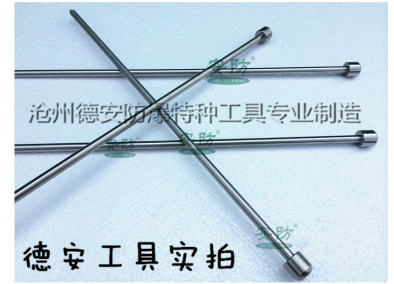

## Product Overview

### Precision Non-Magnetic Alignment Tool

This non-magnetic alignment rod is engineered for use in environments where magnetic interference must be strictly avoided. Constructed from specialized alloys, the tool maintains structural integrity and performance in extreme temperature conditions, ranging from -250 °C to 600 °C. It is an environmentally friendly choice, offering a non-polluting, non-radiative solution for delicate industrial applications.

## Technical Specifications

### Length Range

**300 mm**

Minimum Length

**800 mm**

Maximum Length

### Temperature Performance

| Condition              | Temperature |
|------------------------|-------------|
| High Temperature Limit | 600 °C      |
| Low Temperature Limit  | -250 °C     |

### Material

Titanium Alloy, Stainless Steel

## Key Features

### Environmental & Safety

- Non-magnetic properties
- No pollution
- No radiation
- High thermal stability

### Magnetic Safety

Yes