

# Non-Sparking Sledge Hammer


This sledge hammer is designed for use in environments where flammable or explosive materials are present. It is constructed from non-ferrous materials such as aluminum bronze or beryllium copper.




## Product Overview



Precision-cast sledge hammer with a durable wooden handle for secure grip.

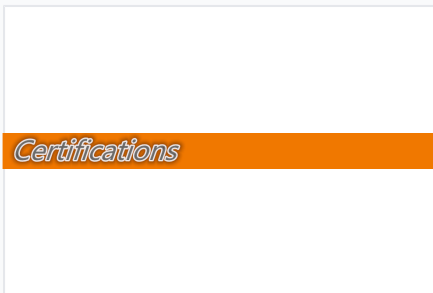

Non-sparking tools are essential for industries like oil, gas, and chemical processing.

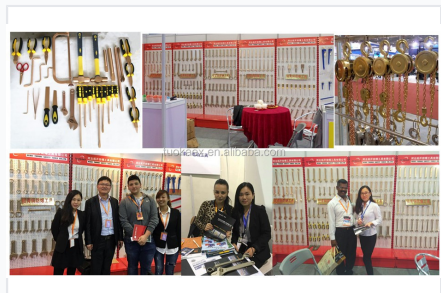

Comprehensive range of non-sparking, explosion-proof hand tools designed for volatile atmospheres.

### Explosion-Proof Sledge Hammers

These non-sparking sledge hammers are engineered specifically for high-risk industrial environments where flammable vapors, liquids, dusts, or residues are present. Constructed from high-quality non-ferrous alloys such as aluminum bronze or beryllium copper, these tools effectively eliminate the risk of mechanical sparks during impact. They are an essential safety requirement for professionals in the oil and gas, mining, and chemical processing sectors.

## Technical Specifications

|                              |                                   |
|------------------------------|-----------------------------------|
| <b>Certifications</b>        |                                   |
| ISO 9001:2008                |                                   |
| <b>Material Composition</b>  | Aluminum Bronze, Beryllium Copper |
| <b>Manufacturing Process</b> | Precision casting                 |
| <b>Handle Material</b>       | Wood                              |

## Dimensions and Weight

### Non Sparking Tools HEBEI TUOKAI SAFETY TOOLS CO.,LTD



Available in various weights to suit heavy-duty striking applications in hazardous environments.

### Size and Weight Specifications

| Model    | Head Weight (g) | Length (mm) | Total Weight (g) |
|----------|-----------------|-------------|------------------|
| TK191-02 | 450             | 310         | 610              |
| TK191-04 | 1000            | 400         | 1300             |
| TK191-06 | 1400            | 400         | 1700             |
| TK191-08 | 1500            | 400         | 1800             |
| TK191-10 | 1800            | 400         | 2100             |
| TK191-12 | 2000            | 400         | 2300             |
| TK191-14 | 2200            | 400         | 2500             |
| TK191-16 | 2500            | 700         | 3210             |
| TK191-18 | 2700            | 700         | 3410             |
| TK191-20 | 3000            | 700         | 3710             |
| TK191-22 | 3600            | 700         | 4310             |
| TK191-24 | 4000            | 900         | 4910             |
| TK191-26 | 4500            | 900         | 5410             |
| TK191-28 | 5000            | 900         | 5910             |
| TK191-30 | 5400            | 900         | 6310             |
| TK191-32 | 6400            | 900         | 7310             |
| TK191-34 | 7200            | 900         | 8110             |
| TK191-36 | 8000            | 900         | 8910             |
| TK191-38 | 8200            | 900         | 9110             |
| TK191-40 | 9100            | 900         | 10010            |
| TK191-42 | 9900            | 900         | 10810            |