


# Non-Sparking Universal Bung Wrench

This non-sparking universal bung wrench is designed for opening and closing oil drums and barrels. It is constructed from a specialized alloy to prevent sparks in hazardous environments.

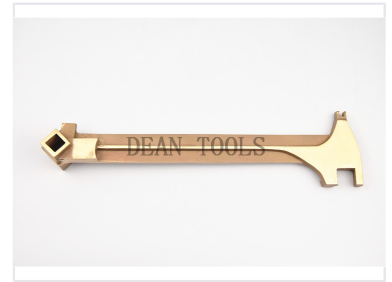

## Product Overview

### Safety-First Design

This universal bung wrench is specifically engineered for hazardous environments where spark prevention is critical. Constructed from specialized copper alloys, it ensures safe operation when opening or closing oil drums and barrels. Its versatile design is suitable for use across the petroleum, chemical, mining, and power generation industries.

## Technical Specifications

### Material Performance

Material	Hardness	Tensile Strength
Aluminum-Bronze	25 HRC	75-85 kgf/mm
Beryllium-Bronze	35 HRC	105-120 kgf/mm

### Available Colors

Natural • Green

### Material Composition

Aluminum Copper, Beryllium Copper

### Overall Length

385 mm

## Compliance & Quality

### Key Features

- Non-sparking alloy construction
- High durability for long service life
- Professional-grade safety standard

### Certifications

ISO 9001, UKAS

## Application

### Primary Industries

Petroleum, Chemical, Power Generation, Railroad, Mining