


# Outdoor LED Flood Light

This flood light fixture is designed with a high-pressure die-casting aluminum housing treated with an electrostatic spraying. It features 5 mm thickness tempered glass and a 0.27 mm high purity aluminum reflector.

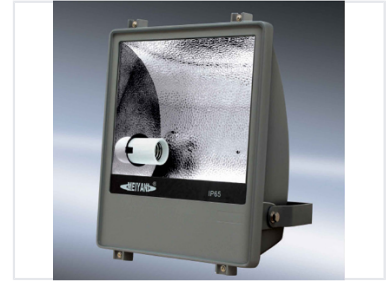

## Product Overview

### Professional Outdoor Illumination

This high-performance flood light fixture is engineered for durability and reliability in demanding outdoor environments. Constructed with high-pressure die-casting aluminum housing and 5mm tempered glass, it offers robust protection against the elements. Its design ensures symmetrical and asymmetrical light distribution, making it an ideal choice for architectural, security, and landscape lighting projects.

## Technical Specifications

### Compatible Lamps

- MH 250W
- MH 400W
- HPS 250W
- HPS 400W

Operating Voltage	110-130V/60Hz, 220-240V/50Hz
-------------------	------------------------------

Lamp Base Type	E40
----------------	-----

## Construction & Durability

### IP Rating

IP65

Housing Material	High pressure die-casting aluminum
------------------	------------------------------------

Glass Thickness	5 mm
-----------------	------

Reflector Material	High purity aluminum
--------------------	----------------------

## Dimensions

### Fixture Dimensions

Dimension	Value (mm)
A	375
B	485
C	405
D	520
E	170