

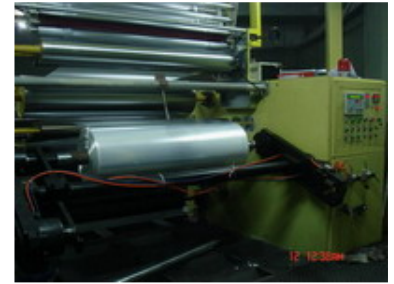



POF Shrink Film Blowing Machine

This shrink film blowing machine produces polyolefin (POF) films for packaging. It features automatic control and a thickness meter for consistent film quality.



ADDITIONAL IMAGES



Overview

High-Performance POF Film Production

This 3-layer POF shrink film blowing machine is engineered for high-efficiency industrial packaging production. Utilizing advanced infrared blowing and sizing technology, it delivers films with superior transparency, high strength, and consistent thickness. The system is highly versatile, capable of producing complex films for diverse packaging needs while meeting stringent international food safety and environmental standards.

Performance Metrics

Key Production Metrics

110 kg/h

Max Output

55 %

Min Shrinkage Rate

60 m/min

Max Haul-off Speed

Technical Specifications

Machine Specifications

Parameter	Value
Film Thickness	0.010 - 0.025 mm
Folder Width	1300 mm
Total Power	270 kW
Machine Weight	15000 kg
Dimensions	9000 x 5500 x 10000 mm

Machine Details

- Haul-off system: Cylinder clamp
- Haul-off unit: Center winding with rotation
- Centrum height: 9800 mm
- Haul-off diameter: 300-600 mm

Features

Key Features

3-Layer Co-extrusion, Food Sanitation Compliant, High Shrinkage Capacity, Infrared Blowing Technology, Environmentally Friendly, Easy Recycle