


Residual Current Circuit Breaker RCCB

This residual current circuit breaker (RCCB) conforms to IEC61008-1 standards. It is designed for 230/240V (1P+N) or 400/415V (3P+N) AC 50/60Hz circuits, with rated currents from 10A to 40A and residual operating currents from 30mA to 500mA.



ADDITIONAL IMAGES

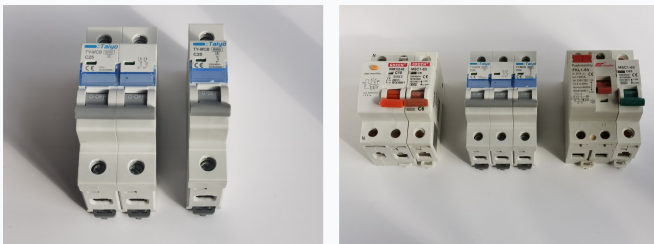

Product Overview

Reliable Circuit Protection

These residual current circuit breakers are engineered to provide superior protection against earth leakage currents, electrical shock, and potential fire hazards. Designed for versatility, they are suitable for a wide range of residential, commercial, and industrial electrical systems. Each unit features a compact, robust design that ensures easy installation in standard distribution boards while maintaining high operational reliability.

Electrical Specifications

Rated Voltages

- 1 Pole+N: 230/240V
- 3 Pole+N: 400/415V

Rated Residual Operating Current

- 30mA
- 100mA
- 300mA
- 500mA

Rated Current Options

10A, 16A, 20A, 25A, 32A, 40A

Standards and Compliance

International Standards

IEC 61008-1 • ISO 9001

Performance Metrics

Performance Overview

6000 A

Short-circuit Breaking Capacity

50 Hz

Operating Frequency