


Sanding Abrasive Material

This sanding abrasive material is used in both machinery and handheld applications. It is suitable for both wet and dry performance and has a standard width of 1420mm.

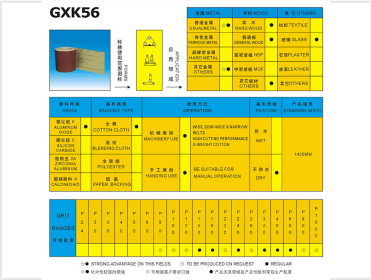

GXK56

Technical specifications and application details for GXK56 sanding abrasive material, including grain types, backing materials, and performance characteristics.

Overview

Versatile Sanding Abrasive Material

The GXK56 sanding abrasive material is designed for high-performance grinding and finishing across a wide range of industrial applications. Featuring multiple grain types and backing options, it provides flexibility for both machinery and manual operations. This abrasive is engineered to deliver consistent results on materials ranging from metals and wood to glass and leather.

Technical Specifications

Standard Width	1420 mm
Available Grain Types	Aluminum Oxide, Silicon Carbide, Zirconia Aluminum, Calcined A/O
Backing Materials	Cotton Cloth, Blending Cloth, Polyester, Paper Backing

Performance

Suitable Operations

Machinery Use • Handing Use

Performance Features

Wet • Dry • High Cutting Performance

Applications

Primary Application Fields

- Metal (General & Hard)
- Wood (Hard Wood, MDF, HDF)
- Glass
- Plaster
- Leather
- Textile