


Single Pole HVAC Contactor, 20-30A

This single pole contactor is designed for HVAC applications. It is rated for 20-30A and utilizes silver cadmium oxide contacts.



ADDITIONAL IMAGES

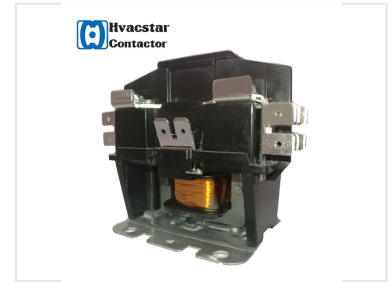

Product Overview

High-Performance Single Pole HVAC Contactor

This SA series single pole contactor is engineered specifically for reliable operation in HVAC and refrigeration control circuits. It supports a wide operating voltage range of 24V to 480V and is capable of handling current ratings between 20A and 30A. With an electrical life of up to 250,000 cycles for resistive loads, this component offers exceptional durability and performance for demanding air conditioning systems.

Technical Specifications

Key Performance Metrics

30 A

Max Rated Current

1000000 cycles

Mechanical Life

250000 cycles

Electrical Life (Resistive)

Operating Characteristics

| Parameter | Details |
|-------------------|------------|
| Poles | 1 |
| Operating Voltage | 24V - 480V |
| Phase | 1 Phase |
| Series | SA Series |

Voltage & Ampere Ratings

| Voltage (VAC) | FLA | LRA |
|---------------|-----|-----|
| 277 | 30 | 180 |
| 480 | 30 | 150 |
| 600 | 30 | 120 |

Manufacturing & Service

Service Capabilities

OEM/ODM Available, Fast Delivery, Competitive Pricing, Quality Reliability, 18-Year Export Experience