


# Three-Phase Star-Delta Reduced Voltage Starter

This starter is designed to reduce inrush current during motor startup, minimizing stress on the motor and electrical infrastructure. It utilizes a three-contactor design for seamless switching between star and delta connections and includes overload protection.

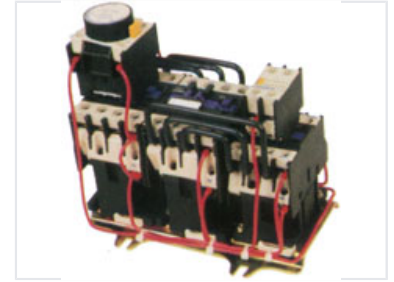

## Product Overview

### Three-Phase Star-Delta Reduced Voltage Starter

This robust and reliable solution is designed for the efficient starting of three-phase induction motors. By utilizing a star-delta configuration, the starter effectively reduces inrush current during the startup phase, significantly minimizing mechanical stress on the motor and electrical infrastructure. Its modular construction ensures straightforward installation and maintenance for demanding industrial environments.

## Technical Specifications

### Primary Applications

- Three-phase induction motor control
- Industrial machinery
- Systems requiring voltage dip mitigation

### Switching Design

Three-contactor design

### Safety Features

Overload Protection, Reduced Voltage Starting

## Performance Metrics

### Key Performance Benefits

**0 Optimized**

Inrush Current Reduction

**0 Minimized**

Mechanical Stress