


Three-Way Ball Valve

This three-way ball valve is designed according to ANSI B 16.34 standards and tested per API 598. It has a working pressure of 6.3MPa (1000PSI) and is compatible with water, oil, and gas.

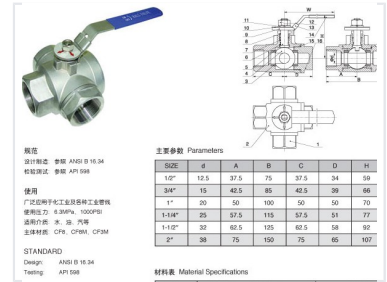

Overview

High-Performance Three-Way Ball Valve

This three-way ball valve is engineered for demanding industrial applications, including chemical processing and general pipeline systems. Designed to meet rigorous ANSI B 16.34 standards and verified through API 598 testing, it ensures reliable performance and durability. With a robust working pressure rating of 6.3MPa (1000PSI), this valve is a versatile solution for controlling the flow of water, oil, and gas.

Technical Specifications

Working Pressure

6.3 MPa
Pressure

1000 PSI
Pressure

Body Materials

CF8 • CF8M • CF3M

Compatible Media

- Water
- Oil
- Gas

Design Standards

ANSI B 16.34, API 598

Dimensional Data

Dimensional Parameters

Size	d	A	B	C	D	H
1/2"	12.5	37.5	75	37.5	34	59
3/4"	15	42.5	85	42.5	39	66
1"	20	50	100	50	50	70
1-1/4"	25	57.5	115	57.5	51	77
1-1/2"	32	62.5	125	62.5	58	92
2"	38	75	150	75	65	107