


Two-Conductor Security System Cable

This two-conductor security cable features a gray PVC jacket, a red conductor, and a bare copper conductor. Designed for low-voltage security system applications, it provides reliable signal transmission for alarms, sensors, and other security devices.

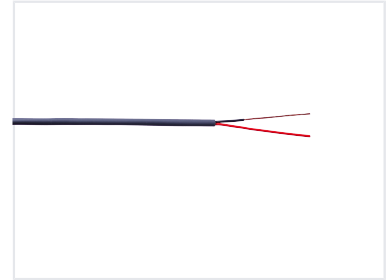

Product Overview

Professional Security System Connectivity

This two-conductor security cable is engineered for reliable, low-voltage signal transmission in alarm and sensor applications. Featuring high-quality stranded or solid copper conductors protected by a durable PVC jacket, it ensures long-term performance and ease of installation. With multiple flame-retardant compliance options, this cable is a versatile choice for professional security infrastructure projects.

Technical Specifications

Core Configuration

- 2 Core
- 4 Core

Conductor Type	Stranded Bare Copper, Solid Copper
AWG Size	22-20 AWG
Shielding	Shielded, Unshielded

Electrical Characteristics

DC Voltage Test

1000 V

Voltage Rating

Minimum Insulation Resistance	500 M@ m
Mutual Capacitance	<57.5 nF/km

Compliance & Safety

Flame Retardant Standards

CL2R • CL3R • CL2P • CL3P