


Water Pressure Boosting Pump

This water pressure boosting pump enhances water pressure in domestic water systems. It is designed for liquid temperatures from +2°C to +60°C and operates below 41dB(A).

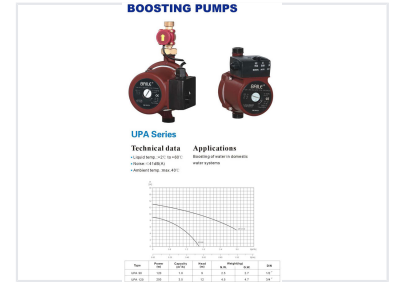

Product Overview

Domestic Water Boosting Solutions

The UPA series automatic water boosting pump is engineered for domestic water systems to provide reliable and consistent pressure. Operating with minimal noise levels below 41dB(A), it integrates seamlessly into residential environments. It is designed to handle liquid temperatures ranging from +2°C to +60°C and functions optimally in ambient temperatures up to 40°C.

Operational Metrics

Key Performance Metrics

41 dB(A)

Max Noise Level

60 °C

Max Liquid Temp

40 °C

Max Ambient Temp

Technical Data

Model Specifications

Model	Power	Capacity	Head	Connection
UPA 90	120W	1.8 m³/h	9m	1/2"
UPA 120	250W	3.5 m³/h	12m	3/4"

Operational Features

Control Modes

Manual, Auto, Off

Compliance

Certifications

CE