


# Portable Gasoline Generator Set with 220V Output

This gasoline generator set delivers 220V/50Hz power for a variety of uses. It includes overload protection and automatic voltage regulation to ensure a consistent power supply.



## ADDITIONAL IMAGES

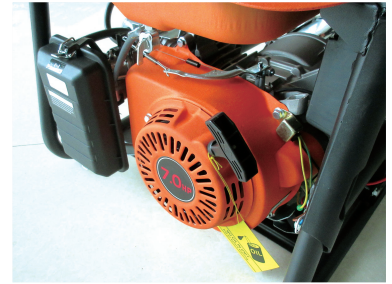

## Product Overview

### Reliable Portable Power

This portable gasoline generator set is engineered for consistent performance, featuring an overhead valve engine with an automatic decompression device for easy starting. Equipped with an automatic voltage regulator (AVR), it ensures stable power output suitable for sensitive electrical equipment. The unit includes advanced safety features like an oil alert system and a large-capacity silencer to minimize operational noise.

## Performance Metrics

### Key Performance Indicators

<b>2000 W</b> Rated Power Output	<b>2200 W</b> Max Power Output	<b>5.5 HP</b> Max Engine Output	<b>65 dB</b> Noise Level (at 7m)
-------------------------------------	-----------------------------------	------------------------------------	-------------------------------------

## Technical Specifications

### Electrical Data

Parameter	Value
Rated Voltage	220 V
Rated Current	9.1 A
Frequency	50 Hz
DC Output	12V 8.3A

### Engine Specifications

- Model: 168F
- Type: Single cylinder, 4-Stroke
- Displacement: 163cc
- Starting System: Recoil start / Key start

## Physical Characteristics

### Dimensions and Capacity

- Fuel Tank Capacity: 15 L
- Net Weight: 38 kg
- Dimensions: 605 x 480 x 475 mm

## Features

### Safety and Protection

Oil Alert System, Automatic Voltage Regulator (AVR), Overload Protection, Low Vibration Aluminum Connecting Rod, Transistor Ignition System