


Electronic Ballast for Fluorescent Lamps

This electronic ballast is designed for fluorescent lamps. It operates at 220-240V AC and 50/60Hz and is suitable for T8 or T10 lamps, offering high power factor and energy efficiency.

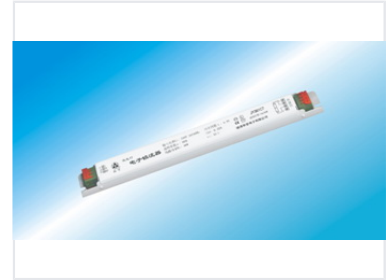

Overview

High-Efficiency Electronic Ballast

This electronic ballast is engineered to provide reliable and energy-efficient operation for T8 and T10 fluorescent lamps. Designed for industrial and commercial environments, it ensures stable lighting performance with a high power factor. Its robust construction supports standard 220-240V AC input, making it a versatile solution for various lighting infrastructure needs.

Electrical Specifications

Input Current

0.22 A

Min Current

0.3 A

Max Current

Input Voltage	240 V
Frequency	50/60Hz
Power Factor (cos ϕ)	0.95

Operating Conditions

Thermal Limits

Metric	Temperature
Ambient Temperature (Ta)	50°C
Case Temperature (Tc)	75°C

Compatibility

Compatible Lamp Types	T8, T10
-----------------------	---------

Identification

Model Identifier	JPT8007
------------------	---------