


General Purpose Mild Steel Link Chain

This general purpose chain is constructed from mild steel. It is suitable for lifting, towing, and securing applications within machinery and industrial settings where high strength is not critical.

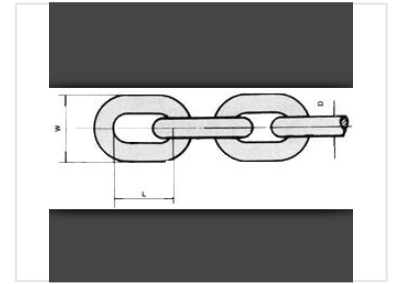

Product Overview

General Purpose Mild Steel Link Chain

This general-purpose mild steel link chain is designed for a variety of industrial and commercial applications, including securing, towing, and light lifting. Constructed with durable, interconnected oval links, it provides reliable performance for non-critical load-bearing tasks. Available in a wide range of sizes from 1/8 inch to 1 inch, this chain is engineered to meet standard industrial specifications for strength and weight.

Technical Dimensions

Dimensions & Load Specifications

Size (in)	Diameter (mm)	Length (mm)	Width (mm)	Test Load (kg)	Breaking Load (kg)
1/8	3.2	16	12	200	400
5/32	4	18.5	14.5	300	600
3/16	4.7	19	17	400	800
7/32	5.5	20	19	550	1100
1/4	6.35	22	21	750	1500
5/16	7.94	26	26	1200	2400
3/8	9.5	28	32	1700	3400
7/16	11.11	33	36	2300	4600
1/2	12.7	39	43	3000	6000
5/8	15.8	45	53	4700	9400
3/4	19	55	63	6800	13600
7/8	22.2	64	74	9250	18500
1	25.4	73	84	12150	24300

Material & Finish

Material	Mild Steel
Available Finishes	B.F., H.D.G.