


# HSS-CO Countersink Drill Bit Set

This high-speed steel cobalt (HSS-CO) countersink drill bit set has a 75° countersink angle and three cutting edges. It features a tin-coated surface treatment for enhanced durability and performance and is ideal for creating countersunk holes in a variety of materials.

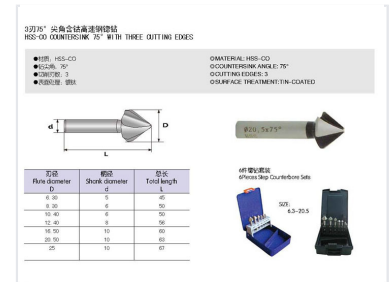

## Product Overview

### High-Performance Countersink Set

This HSS-CO countersink drill bit set is engineered for precision and durability in industrial applications. Featuring a 75° countersink angle and three cutting edges, these bits ensure clean, efficient material removal. The TiN-coated surface treatment significantly enhances wear resistance, making them ideal for creating professional-grade countersunk holes across a variety of materials.

## Technical Specifications

### Surface Treatment

TiN-Coated

### Material

HSS-CO (High-Speed Steel Cobalt)

### Countersink Angle

75 °

### Cutting Edges

3

### Set Composition

6-Piece Set

## Dimensions and Sizing

### Size Specifications

| Flute Diameter (mm) | Shank Diameter (mm) | Total Length (mm) |
|---------------------|---------------------|-------------------|
| 6.3                 | 5                   | 45                |
| 8.3                 | 6                   | 50                |
| 10.4                | 6                   | 50                |
| 12.4                | 8                   | 56                |
| 16.5                | 10                  | 60                |
| 20.5                | 10                  | 63                |
| 25                  | 10                  | 67                |