


Universal Pipe Couplings

Universal couplings connect pipes of different materials and sizes, offering a versatile solution for various piping systems. These couplings feature a flexible elastomeric sealing sleeve that provides a leak-tight seal and accommodates pipe misalignment.



ADDITIONAL IMAGES

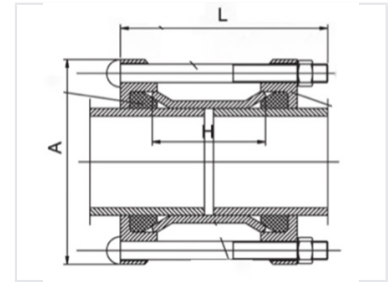

Product Overview

Universal Pipe Couplings

These universal couplings serve as a versatile solution for connecting pipes of varying materials and external diameters. Engineered to accommodate significant pipe tolerances, they simplify installation processes and minimize the need for time-consuming trial adjustments. Their robust construction ensures long-term reliability in water, wastewater, and industrial piping systems.

Materials & Standards

Material Specifications

- Body: Ductile Iron GGG-50
- End Ring: Ductile Iron GGG-50
- Gasket: EPDM / NBR / SBR
- Bolts & Nuts: Carbon Steel / SS304 / SS316
- Coating: Epoxy

Performance

Key Advantages

High Tolerance, Easy Installation, Reduces Stock Holding, Vibration Compensation

Dimensions

Technical Dimensions

Size	Range (mm)	A (mm)	L (mm)	Bolts	Quantity
DN40	48-63	165	100	M12*180	2
DN50	59-72	180	95	M12*180	2
DN65	72-85	180	95	M12*180	3
DN80	88-103	190	95	M12*180	3